



EV9612-50

# BH<sup>2</sup> Filter Cartridge

Delivers premium quality water for coffee applications



BH<sup>2</sup> Replacement Cartridge: EV9612-50

## BENEFITS

- New and improved Micro-Pure II media with AgION™ antimicrobial protection inhibits any potential bacterial growth
- Provides clear, fresh, premium quality ingredient water for consistently great tasting coffee and beverages
- Everpure's unique filter blend using activated carbon reduces chlorine taste and odor and other offensive contaminants
- Saves energy by reducing scale build-up.
- Proportioned scale inhibitor feed dramatically prevents limescale from forming in brewing equipment
- Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size
- Reduces health contaminants such as asbestos fibers and Cryptosporidium and Giardia cysts
- Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination.

## INSTALLATION TIPS

- This system must be installed and maintained according to the manufacturer's instructions, including installation and replacement of filter cartridges
- Install vertically with cartridge hanging down
- Allow 2-1/2" clearance below the cartridges for easy cartridge replacement
- Flush system by running water through cartridges per Installation and Use manual

## OPERATION TIPS

- Change cartridges on a regular 6 month preventative maintenance program
- Change cartridges when capacity is reached or when pressure falls below 10 psi
- Service flow rate must not exceed 0.5 gpm
- Always flush the filter cartridge at time of installation and cartridge change

## APPLICATION/SIZING

- For coffee service applications
- For low flow, medium volume brewers
- Rated Capacity: 3,000 gallons (11,350) or 6,000 pots

# BH<sup>2</sup> Filter Cartridge

## SPECIFICATIONS

**Overall Dimensions:**  
14.5"H x 3.25"Diameter

**Service Flow Rate:**  
Maximum 0.5 gpm (1.9 Lpm)


**Rated Capacity:**  
3,000 gallons

**Pressure Requirements:**  
10 - 125 psi (0.7 – 8.6 bar), non-shock

**Maximum Temperature:**  
35 - 100°F (2 - 38°C)

No electrical connection required

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

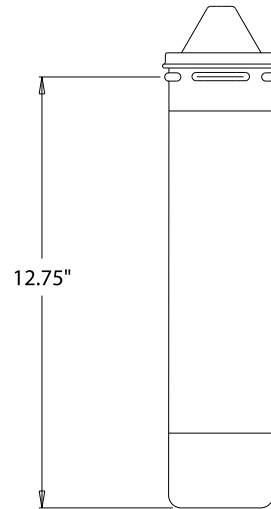

## WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

Distributed by:

**Andrew's**  
Water Treatment

Andrew's Water Treatment Ltd  
47-49 Kensington Road,  
Southport  
PR9 0RY

Tel: 01704 531 556  
<http://www.andrewswater.co.uk>  
[office@andrewwatertreatment.co.uk](mailto:office@andrewwatertreatment.co.uk)