

# i500<sup>2</sup> Filter Cartridge

Delivers premium quality water for ice applications

**EVERPURE**

## APPLICATIONS

Ice machines

## FEATURES AND BENEFITS

Reduces water-related ice machine problems caused by scale build-up from dirt and dissolved minerals.

Reduces chlorine taste and odor and other offensive contaminants.

Self-contained scale inhibitor feed keeps ice machines functioning at full capacity.

Reduces maintenance and service costs by reducing scale and clogging of distribution lines, evaporator plate and pump Micro-Pure® II media with AgION® antimicrobial protection inhibits any potential bacterial growth.

Everpure's unique filter blend uses activated carbon to reduce chlorine taste and odor and other offensive contaminants.

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size.

Reduces health contaminants such as asbestos fibers and Cryptosporidium and Giardia cysts.

Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination.

## OPERATIONAL TIPS

Change cartridges on a regular 6 month preventative maintenance program.

Change cartridges when capacity is reached or when pressure falls below 10 psi.

Always flush the filter cartridge at time of installation and cartridge change.

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



i500 Replacement Cartridge: EV9612-24

## SPECIFICATIONS

<b>Overall Dimensions:</b>	14.5"H x 3.25" Diameter (36.8 x 8.3 cm)
<b>Service Flow Rate:</b>	Maximum 0.5 gpm (1.9 Lpm)
<b>Rated Capacity:</b>	3,000 Gallons (11,356 L)
<b>Pressure Requirements:</b>	10 - 125 psi (0.7 - 8.6 bar), non-shock
<b>Maximum Temperature:</b>	35 - 100°F (2 - 38°C)
<b>Electrical Connection:</b>	None required

# i500<sup>2</sup> Filter Cartridge

## EV9612-24


### INSTALLATION TIPS

Install vertically with cartridge hanging down.

Allow 2-1/2" clearance below by running water through filter for three minutes at full flow.

Flush cartridge by running water through filter for three minutes at full flow.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

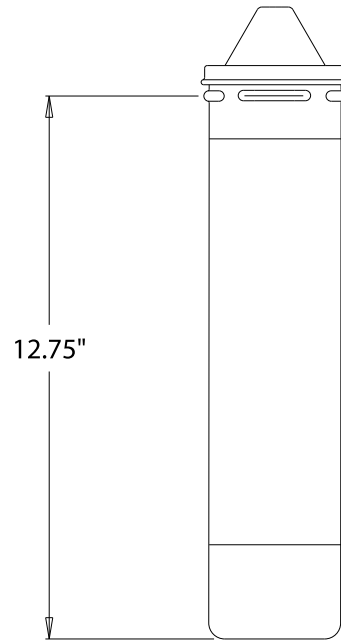

*Everpure reserves the right to update specifications, change prices, or make substitutions without notice.*

EV9612-24 i500 JA11

Andrew's Water Treatment

Andrew's  
Water Treatment

Andrew's Water Treatment Ltd  
47-49 Kensington Road,  
Southport  
PR9 0RY

Tel: 01704 531 556  
<http://www.andrewswater.co.uk>  
[office@andrewswatertreatment.co.uk](mailto:office@andrewswatertreatment.co.uk)